

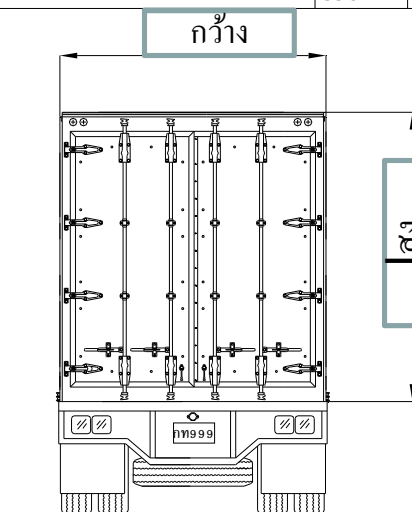


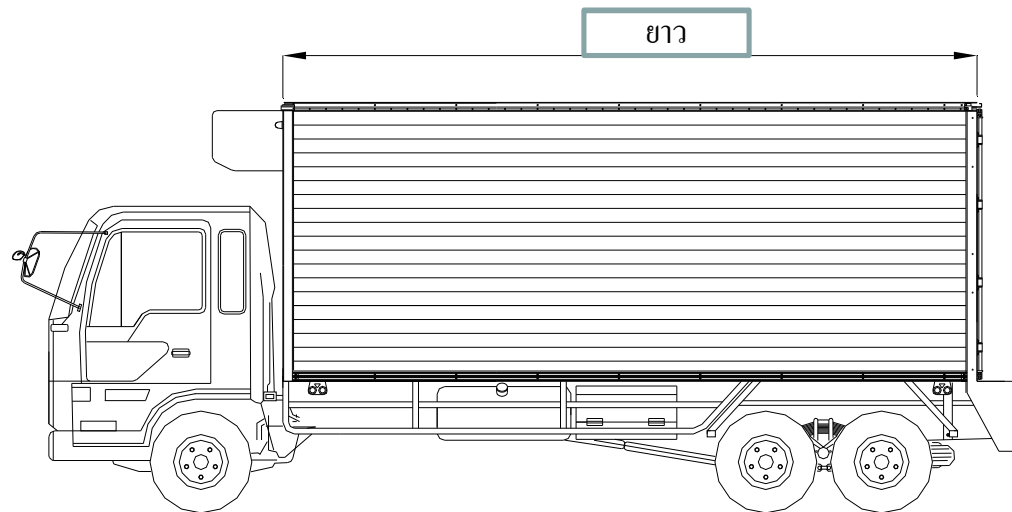

ขนาดตู้

ขนาดตู้ภายนอก (กว้าง x ยาว x สูง)	ขนาดตู้ภายใน (กว้าง x ยาว x สูง)	ปริมาตร(ลบ.ม.)
2350 x 6500 x 2500	2140 x 6300 x 2210	29.80
2500 x 6400 x 2500	2290 x 6200 x 2210	31.38
2500 x 6700 x 2500	2290 x 6500 x 2210	31.38
2500 x 7300 x 2500	2290 x 7100 x 2210	35.43
2500 x 7600 x 2500	2290 x 7400 x 2210	37.45
2500 x 7800 x 2500	2290 x 7600 x 2210	38.46
2500 x 8700 x 2500	2290 x 8500 x 2210	38.46
2500 x 6100 x 2500	2290 x 5900 x 2210	30.87
2500 x 6600 x 2500	2290 x 6400 x 2210	32.39
2500 x 7100 x 2500	2290 x 6900 x 2210	34.92
2500 x 7400 x 2500	2290 x 7200 x 2210	36.94
2500 x 7800 x 2500	2290 x 7600 x 2210	38.46

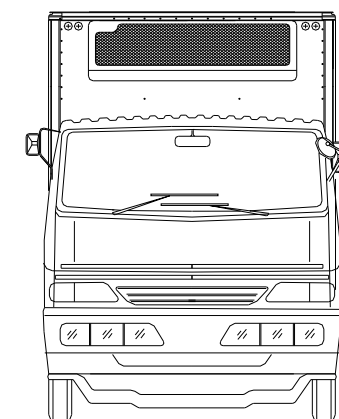

(.....)

ผู้อนุมัติแบบ

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

Designed by	Checked by	Approved by - date	Filename	Date	Scale
PAIROJE				23/01/57	1:100
GOODTEMP CO.,LTD				Edition	Sheet
					1-1

GTDE-20 Direct Drive wiht Stand by Unit

Set Part No. 24V. 9691-0010-00

CONDENSING & STAND-BY UNIT




FREEZER UNIT



WIRE HARNESS
8150-0412-01



DIGITAL
THERMO-CONTROL
MANUAL (AUTO DEFROST)
9042-0105-00

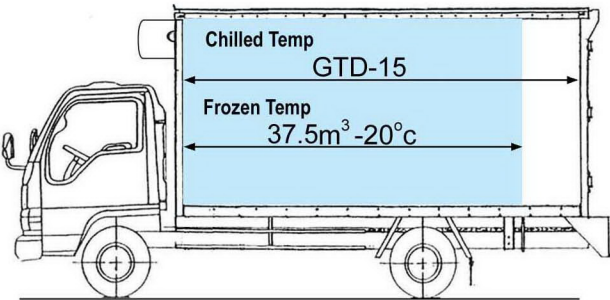

	Inner Container Size Max Size (Meter)			Inner Vol. (m ³)
	L	W	H	
Frozer Temp	7.55	2.20	2.25	37.5
Chilled Temp	GTD-15			

- Advantage**
- 1. High Efficiency Cooling Performance
 - 2. Electrical System : Easy for Maintenance
 - 3. Easy for Installation

SPECIFICATION

	Condensing Unit	Freezer Unit
	24V.	24V.
Part No.	9150-0236-00	9261-0121-00
Recommend Compressor	300 cc. or Equivalent	
Condenser	Aluminium Fins + Aluminium Tube	
Coil	Aluminium Fins + Aluminium Tube	
Defrost	Manual (Automatic Hot Gas Defrost)	

Cooling Capacity

Ambient Temp. 35°C (95F)

1BTU = 0.29307 WATTS

On Air return		Direct Drive		Electric Stand by 50hz		Recommend Refrigerant
Degrees C	Degrees F	Watts	Btu/hr	Watts	Btu/hr	
0	32	15,000	51,300	10,524	35,910	R-134a
-20	-4	5,400	18,400	3,775	12,880	R-404
-25	-13	4,700	16,100	3,303	11,270	R-404

* Specification are subject to change without notice.


GTDE-15 Direct Drive wiht Stand by Unit

Set Part No. 24V. 9691-0009-00

CONDENSING & STAND-BY UNIT




FREEZER UNIT

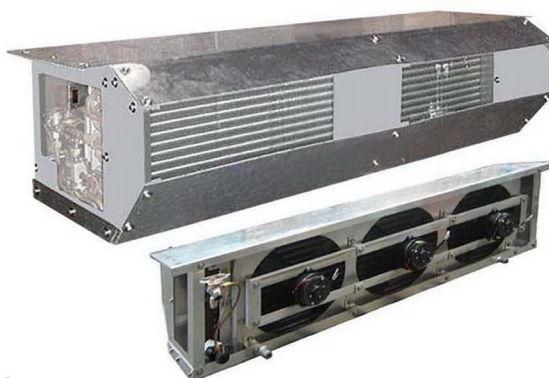

WIRE HARNESS
8150-0412-01



DIGITAL
THERMO-CONTROL
MANUAL (AUTO DEFROST)
9042-0105-00

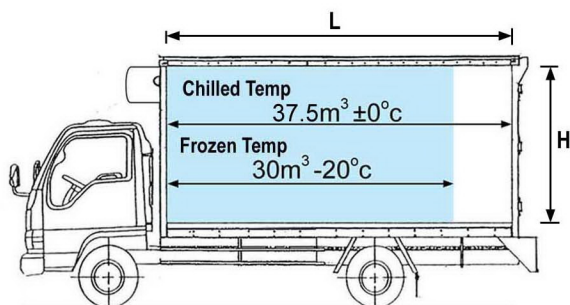

	Inner Container Size (Meter)			Inner Vol. (m³)
	L	W	H	
Chilled Temp	7.55	2.20	2.25	37.5
Frozer Temp	6.25	2.25	2.18	30

Advantage

1. High Efficiency Cooling Performance
2. Electrical System : Easy for Maintenance
3. Easy for Installation

SPECIFICATION

	Condensing Unit	Freezer Unit
	24V.	24V.
Part No.	9690-0006-00	9261-0120-00
Recommend Compressor	200 cc. or Equivalent	
Condenser	Aluminium Fins + Aluminium Tube	
Coil	Aluminium Fins + Aluminium Tube	
Defrost	Manual (Automatic Hot Gas Defrost)	

Cooling Capacity

Ambient Temp. 35°C (95F)

1BTU = 0.29307 WATTS

On Air return		Direct Drive		Electric Stand by 50hz		Recommend Refrigerant
Degrees C	Degrees F	Watts	Btu/hr	Watts	Btu/hr	
0	32	14,500	49,400	10,134	34,580	R-134a
-20	-4	5,200	17,700	6,631	12,390	R-404
-25	-13	4,500	15,500	3,180	10,850	R-404

* Specification are subject to change without notice.

GTD-20 Direct Drive System (R-404A)

Part No. 24V. 9691-0007-00

CONDENSING UNIT




FREEZER UNIT



WIRE HARNESS
8150-0412-01



DIGITAL
THERMO-CONTROL
MANUAL (AUTO DEFROST)
9042-0105-00

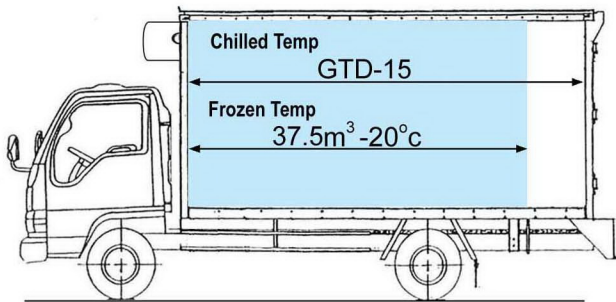

	Inner Container Size Max Size (Meter)			Inner Vol. (m ³)
	L	W	H	
Frozer Temp	7.55	2.20	2.25	37.5
Chilled Temp	GTD-15			

- Advantage**
- 1. High Efficiency Cooling Performance
 - 2. Electrical System : Easy for Maintenance
 - 3. Easy for Installation

SPECIFICATION

	Condensing Unit	Freezer Unit
	24V.	24V.
Part No.	9150-0236-00	9261-0121-00
Recommend Compressor	300 cc. or Equivalent	
Condenser	Aluminium Fins + Aluminium Tube	
Coil	Aluminium Fins + Aluminium Tube	
Defrost	Manual (Automatic Hot Gas Defrost)	

Cooling Capacity

Ambient Temp. 35°C (95F)

1BTU = 0.29307 WATTS

On Air return		Direct Drive		Electric Stand by 50hz		Recommend Refrigerant
Degrees C	Degrees F	Watts	Btu/hr	Watts	Btu/hr	
0	32	15,000	51,300	10,524	35,910	R-134a
-20	-4	5,400	18,400	3,775	12,880	R-404
-25	-13	4,700	16,100	3,303	11,270	R-404

* Specification are subject to change without notice.


GTDE-15 Direct Drive with Stand by Unit

Set Part No. 24V. 9691-0009-00

CONDENSING & STAND-BY UNIT




FREEZER UNIT

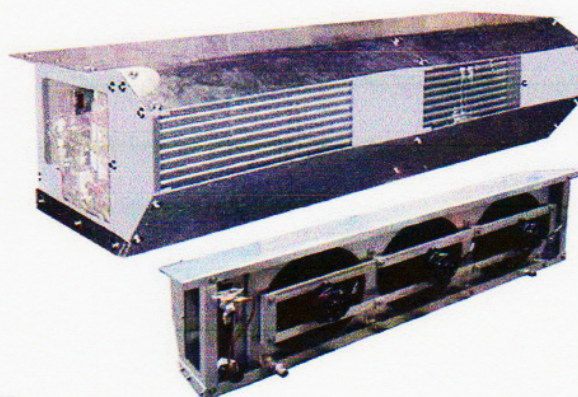

WIRE HARNESS
8150-0412-01



**DIGITAL
THERMO-CONTROL
MANUAL (AUTO DEFROST)**
9042-0105-00

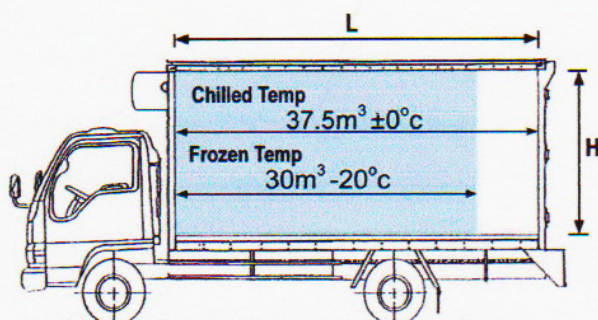

	Inner Container Size (Meter)			Inner Vol. (m³)
	L	W	H	
Chilled Temp	7.55	2.20	2.25	37.5
Frozer Temp	6.25	2.25	2.18	30

Advantage

1. High Efficiency Cooling Performance
2. Electrical System : Easy for Maintenance
3. Easy for Installation

SPECIFICATION

	Condensing Unit	Freezer Unit
	24V.	24V.
Part No.	9690-0006-00	9261-0120-00
Recommend Compressor	200 cc. or Equivalent	
Condenser	Aluminium Fins + Aluminium Tube	
Coil	Aluminium Fins + Aluminium Tube	
Defrost	Manual (Automatic Hot Gas Defrost)	

Cooling Capacity

Ambient Temp. 35°C (95F)

1BTU = 0.29307 WATTS

On Air return		Direct Drive		Electric Stand by 50hz		Recommend Refrigerant
Degrees C	Degrees F	Watts	Btu/hr	Watts	Btu/hr	
0	32	14,500	49,400	10,134	34,580	R-134a
-20	-4	5,200	17,700	6,631	12,390	R-404
-25	-13	4,500	15,500	3,180	10,850	R-404

* Specification are subject to change without notice.